

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications  
 DIN EN 60 664  
 DIN EN 61 984



Inserts

- 01. Number of contacts : 9
- 02. Rated Current : 5A
- 03. Rated Voltage : 50V
- 04. Pollution degree : 3
- 05. Rated impulse voltage : 0.8kV
- 06. Insulation resistance :  $\geq 10\Omega$
- 07. Material: Polycarbonate
- 08. Limiting temperatures :  $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$
- 09. Flammability acc. to UL94: V0
- 10. Mechanical working life (mating cycles) :  $\geq 500$

Contacts

- 01. Material: Copper alloy
- 02. Surface: hard-silver plated  
: hard-Gold plated
- 03. Contact resistance :  $\leq 3\text{m}\Omega$
- 04. Terminal: Crimp terminal
- 05. Wire gauge : 0.09-0.82mm<sup>2</sup> (AWG 28-18)
- 06. Rohns Compliance

Note: Crimp contact pins should order separately

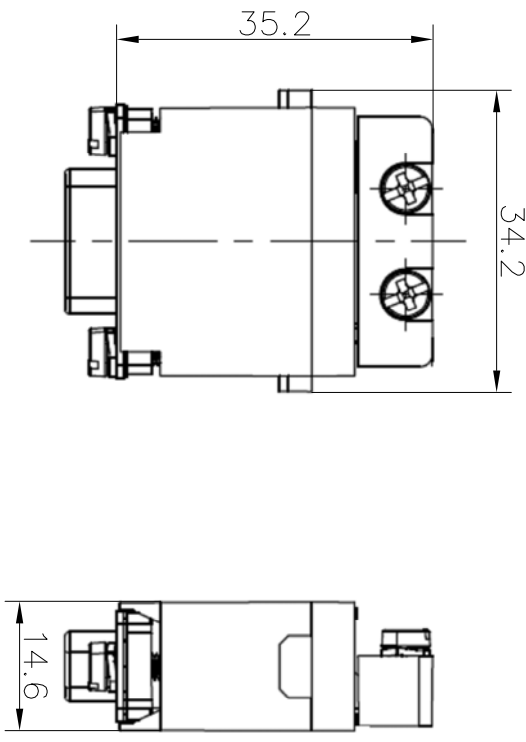

DETACHED LISTS			
PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
APPD:		宁波高松电子有限公司	
CHKD:		DKE-009-FC	
DRFT:	Mf.yong 2016.08.22	TITLE:	CUSTOMER DRAWING
		DRAWING NO.:	
		DO NOT SCALE DRAWING	SCALE
			1.5:1

A 8 7 6 5 4 3 2 1