
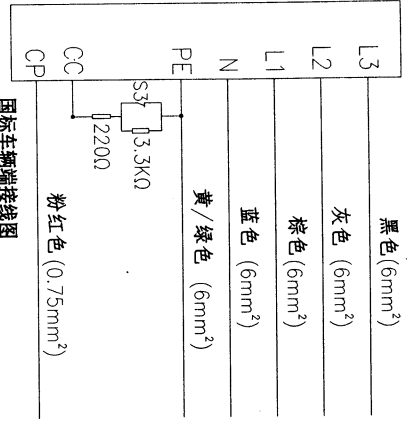

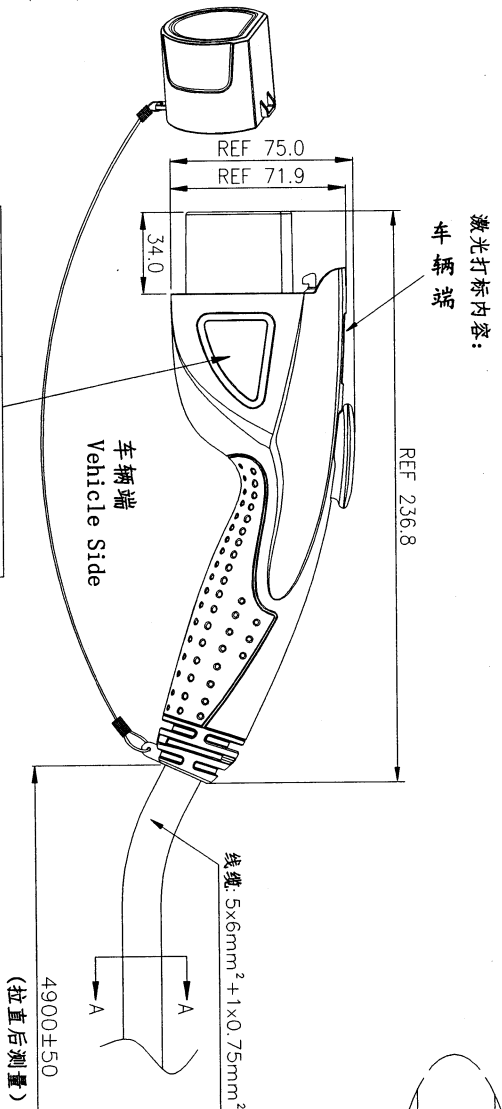


该产品符合最新国标《电动汽车传导充电用连接装置》符合国标GB/T20234.1、2-2015要求


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

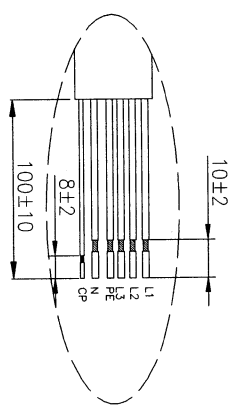

NOTE:
RC=2200±3%
R4=3.3kΩ±3%

指示面激光打标内容如下:
DEGSON
 MGA0CT032AV035.0M50AH
 32A 440V AC
 GB/T20234.2-2015
 IP55(mated)
 20XXXXXXX-XXXX

另一面激光打标内容(Actual字体)如下:
 MGA0CT032AV035.0M50AH
 32A 440V AC
 GB/T20234.2-2015
 IP55(mated)
 20XXXXXXX-XXXX

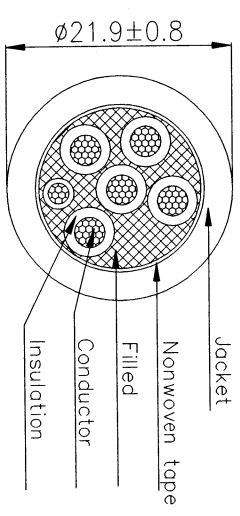

技术参数

额定电压	440V AC
额定电流	32A
温度范围	-30℃ ~ +50℃
绝缘电阻	>5MΩ, 500V DC 1min
耐压	L, N and PE 2500V AC 1min L and N 2500V AC 1min
防水等级	IP55(Mated)
插拔寿命	10,000 Times
插拔力	<100N
标准	GB/T 20234.1、2-2015

CUSTOMER DRAWING

线性尺寸范围	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
角度尺寸范围	.XX	.X
	±0.5°	±1.0°

PART NO.:	
APPD:	ZX 2020.5.13
CHKD:	DT 2020.5.6
DRFT:	LHW 2020.05.06

宁波高松电子有限公司
DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
 名称: 国标交流车辆端充电枪 (32A三相)
 MGAC-T-032A-V-03-5.0M-50A(H)
 标题: CUSTOMER DRAWING
 图号: DT 2020.5.6
 版本: TO-1
 比例: 1:1