

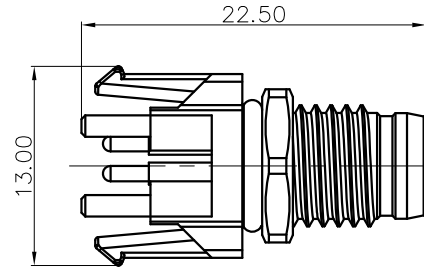


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
- Withstanding voltage : 850V
- Levels of protection: IP67
- Wire connection mode: soldering(PCB)
- Operating temperature: -20°C~+80°C
- For Panel Thickness Max: 1.0~2.5mm
- RoHS Compliance
- Tolerance :


.X	±0.25mm
.XX	±0.1mm
∠	±1°

SP-M8A-XXP-MM-SF7005-00A(H)


PIN NO.: 03、04

3pin A Coding

4pin A Coding





Pin Assignment Front View




Pin Assignment Front View

Panel mounted



PCB layout



PCB layout

DETACHED LISTS	PART NO.: SPM8AXXPMMSF700500AH		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SP-M8A-XXP-MM-SF7005-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.: XXXXXXXX-XX-CXX		REV	1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SCALE	1:1