

SPSH-M12X-XXP-FF-SF800X-00A(H)

Coding: A,B,D

Pin number: 03,04,05,  
06,08,10,12

Thread specification:  
001: PG9  
002: M16\*1.5




REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

10pin A Coding	12pin A Coding	5pin B Coding	4pin D Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View


10- $\phi 0.80$	12- $\phi 0.80$		
PCB Layout	PCB Layout	PCB Layout	PCB Layout

3pin A Coding	4pin A Coding	5pin A Coding	6pin A Coding	8pin A Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View

PCB Layout	PCB Layout	PCB Layout	PCB Layout	PCB Layout

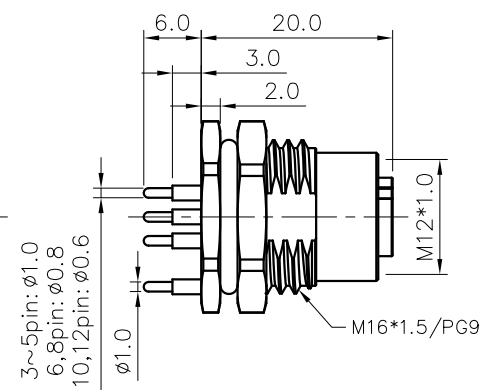


Thread specification:  
PG9



Panel Mounted

Thread specification:  
M16\*1.5



Panel Mounted

NOTES:

- Rated voltage/current : 3pin A: 250V / 4A  
4pin A: 250V / 4A  
5pin A: 60V / 4A  
6pin A: 30V / 2A  
8pin A: 30V / 2A  
10pin A: 30V / 1.5A  
12pin A: 30V / 1.5A  
5pin B: 60V / 4A  
4pin D: 250V / 4A
- Withstanding voltage : 3,4pin A: AC1500V/1Min  
5pin A: AC1120V/1Min  
6,8,10,12pin A: AC500V/1Min  
5pin B: AC1120V/1Min  
4pin D: AC1500V/1Min
- Levels of protection: IP68
- Wire connection mode: soldering(PCB)
- Operating temperature: -40°C~+105°C
- For Panel Thickness Max: 4.5mm
- RoHS Compliance
- Tolerance : ±0.5mm

DETACHED LISTS	PART NO.: SPSHM12XXXPF800X00A	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SPSH-M12X-XXP-FF-SF800X-00A(H)		
	CHKD:	DRFT: SQ 2019.05.17		
	DRFT: SQ 2019.05.17	TITLE: CUSTOMER DRAWING	REV: D0-1	DATE: 2019.05.17
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET: 1/1	SCALE: 1:1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE: 1:1