

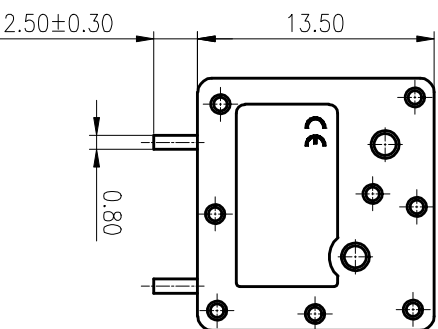
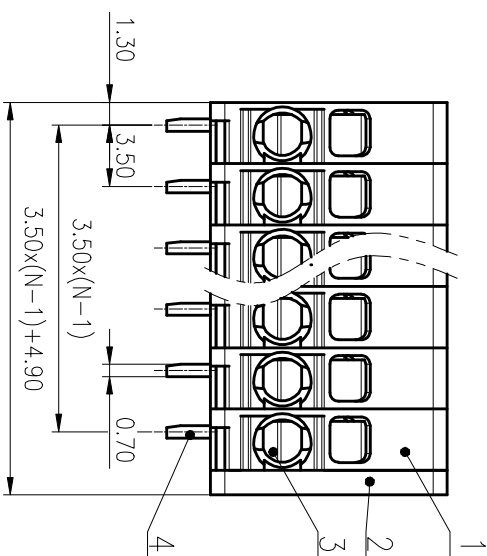
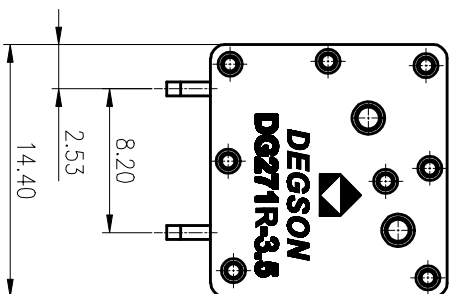


公差等级/General Tolerances(mm)		0.1/1/10	
0	>3	>6	>120
~	~	~	~
3	6	10	180
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±0.93	±1.05	±1.15	±1.60
±2.20	±2.50		
±Z			

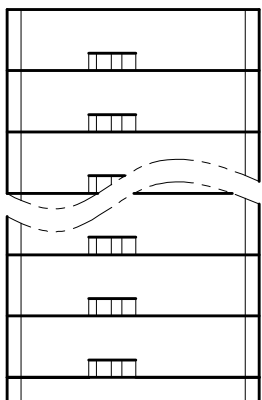

PCB LAYOUT

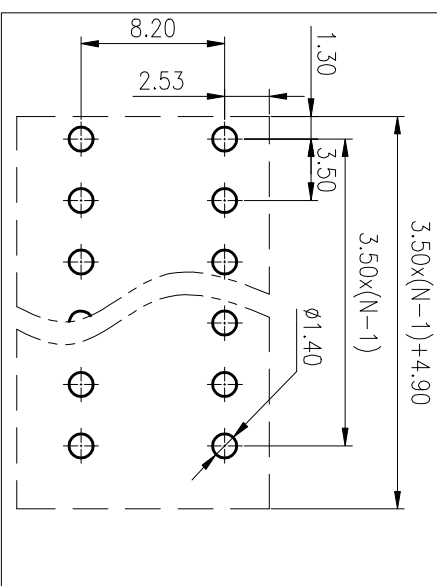

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin header	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE

MATERIAL:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
MAT NO.:	/	APPD:	LIGL 2020.06.15
STATUS:	/	CHKD:	MGEK 2020.06.15
DRAFT:	HS 2019.04.04	DRAWING NO.:	DG271R-3.5-C01
SIZE:	A4	TYPE:	CUSTOMER DRAWING
SCALE:	2.5:1	SCALE:	2.5:1 SHEET
REV	DD-2	REV	DD-2
1/1		1/1	

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	160/17.5/200/17.5/400/17.5		
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~1.5/24~16		
间距/Pitch(mm)/线数范围/Poles	3.50/N=01~24P		
引线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

D

C

B

A

D

C

B

A