


公差等级/General	tolerances/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±Z	

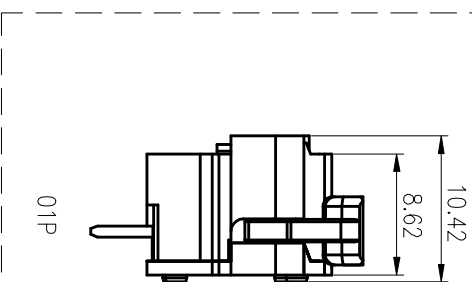

ITEM	NAME OF PART	MATERIAL	NOTES
6	Spring	Stainless steel	/
5	Pin header	Copper alloy	Sn Plated
4	Button	POM	UL94HB
3	Cover	PA66	UL94V-0
2	Housing 2	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 /IEC Standard:	B	C	D
IEC 标准 /IEC Standard:	B	C	D
过压类别 /Overvoltage Category /污秽等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	450/17	750/17	1000/17
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	6	6	6
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/28~12		
间距/Pitch(mm)/线数范围/Poles	7.62/N=01~16P		
剥线长度/Stripping length(mm)	5~6		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Li GI 2020.06.10 NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

CHKD: MoEK 2020.06.10 **DG242V-7.62-XXP-1Y-00A(H)**

DRT: LDD 2016.08.26 DRAWING NO.: DG242V-7.62-C01

TYPE: CUSTOMER DRAWING SCALE: 2:1

REV DD-2 SHEET 1/1

REV ECN DESCRIPTION DRT DATE

SIZE: A4

SCALE: 2:1 SHEET 1/1

D

C

B

A

1

2

3

4

5

6