
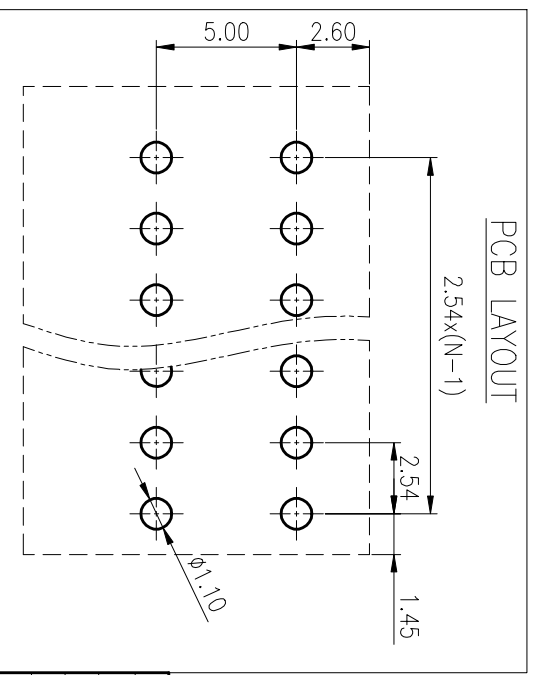
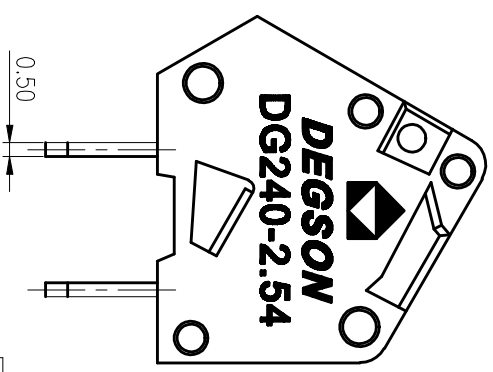
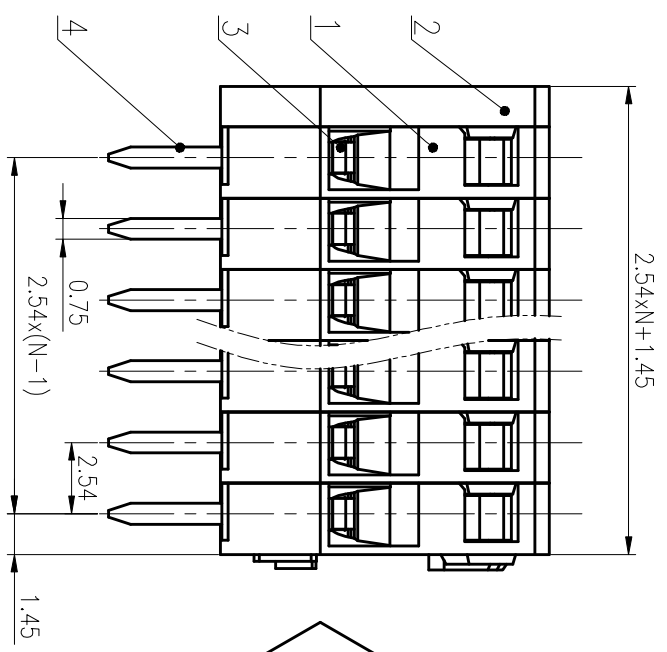


公差等级/General Tolerances(mm)		0.1/1/10	
0	>3	>10	>180
3	~6	~18	~250
6	~10	~30	~315
10	~18	~50	~400
±0.12	±0.18	±0.22	±0.26
±0.31	±0.57	±0.80	±0.93
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
±Z	±Z	±Z	±Z

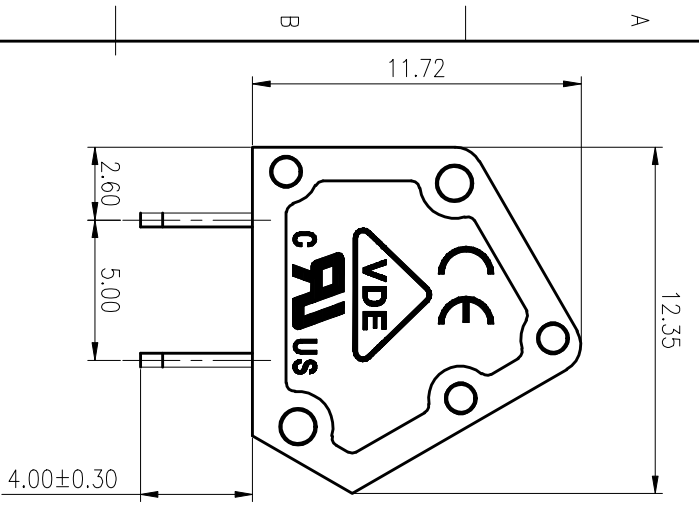

4	Pin header	Copper alloy	Sn Plated
3	Spring	Stainless steel	/
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	150/4	150/4	150/4
IEC 标准/IEC Standard:	B	C	D
IEC 标准/IEC Standard:	III/3	III/2	II/2
过压类别/Overvoltage Category/污秽等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	130/6	/
工频耐压/Withstanding Voltage(V/min)	/	AC1250	/
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~0.5/28~20		
间距/Pitch(mm)/线数范围/Poles	2.54/N=02~24P		
剥线长度/Stripping length(mm)	5~6		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
MATERIAL:	SURFACE: /		
MAT NO.:	/		
STATUS:	/		
APPD: Li GL 2020.06.19	NAME: <b>DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD</b>		
CHKD: Mg EK 2020.06.19	<b>DG240W-2.54-XXP-1Y-00A(H)</b>		
DRAFT: HuangSh 2020.06.19	DRAWING NO.: DG240W-2.54-C01		
REV	ECN	DESCRIPTION	DRAFT
1	2	3	4
1/1	SHEET	SCALE: 4:1	TYPE: CUSTOMER DRAWING