
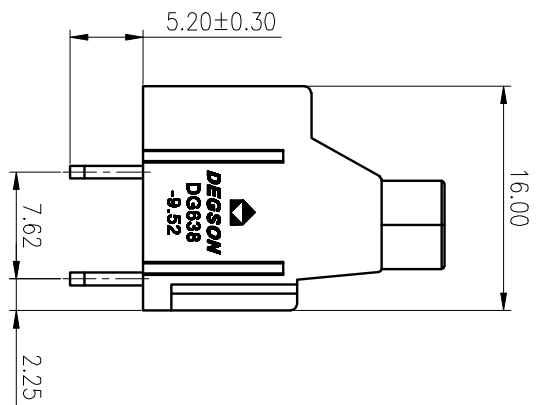


规格/公差 (General)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	公差 (mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10						
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z						
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50								

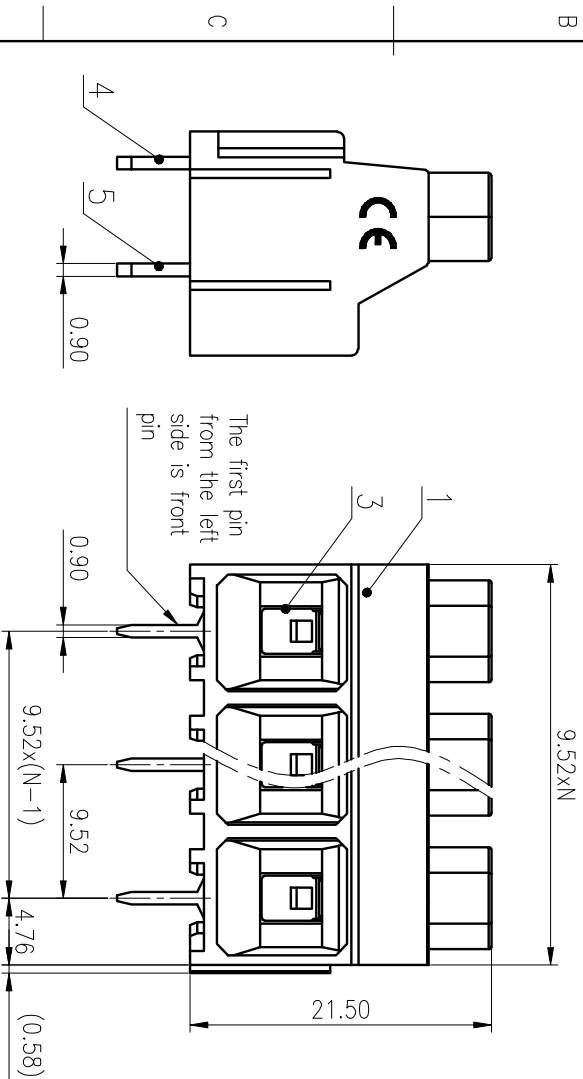

ITEM	NAME OF PART	MATERIAL	NOTES
5	Front pin	Copper	Sn Plated
4	After pin	Copper	Sn Plated
3	Cage	Copper alloy	M3.5/Ni Plated
2	Screw	Steel	M3.5/Zn Plated
1	Housing	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	600/30	600/30	/
IEC 标准 /IEC Standard:	/		
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	690/32	1000/32	1000/32
额定脉冲电压 (kV)/Rate Impulse Voltage(kV)	8	8	6
拧紧扭矩/螺栓和螺线 (Nm/Lbin)	M3.5: 0.8/7.02		
挠性范围 (硬线和软线) /Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~4.0/30~10		
间距/Pitch(mm)	9.52	N=2~16P	
引线长度/Stripping length(mm)	7~8		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: SURFACE: Yes

NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG638-9.52-DA-XP-1Y-00A(H)

DRAWING NO.: DG638-9.52-C02

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				