


Pitch Range		In mm		Nominal Dimension		Range		In mm	
Over	6	Over	10	Over	30	Over	60	Over	100
TO	10	TO	24	TO	70	TO	100	TO	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2	

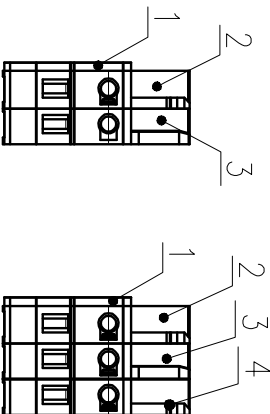

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover	PA66	UL94V-0
2	Side housing	PA66	UL94V-0
3	housing 1	PA66	UL94V-0
4	housing 2	PA66	UL94V-0
5	Clamp	Copper alloy	Sn plated
6	Spring	Stainless steel	

UL 标准 /UL Standard:	B	C	D
额定电压/电涌 /Rated Voltage(V)/Current(A)	300	151	150/151
300/710	300/710	300/710	300/710
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category/ 污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电涌 /Rated Voltage(V)/Current(A)	320/20	/	/
额定脉冲电压(kV) /Rate Impulse Voltage(kV)	4	/	/
线芯范围 (硬线和软线) /Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/22~14		
间距 /Pitch(mm) /线芯范围 /Poles	5.08	N=02~24P	
剥线长度 /Stripping length(mm)	9~10		
使用温度范围 /Operating Temperature(°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		
标准颜色 /Standard color number:	PANTONE 428C		

MATERIAL: /
SURFACE: /
PANTONE: 428C

DEGSON[®] NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

NAME: BEDGKB-5.08-XXP-11-1001A(H)

DRAWING NO: BEDGKB-5.08-1000-C02
TYPE: CUSTOMER DRAWING
SCALE: 1:1
SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

SIZE	mm	inch
A4		