

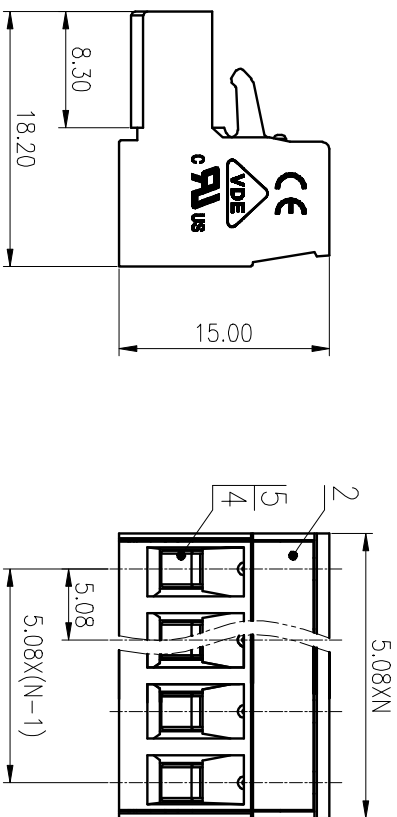


精度等级/General tolerances(mm)		尺寸/Dimension											
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/10 ±Z
~	~	~	~	~	~	~	~	~	~	~	~	~	
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

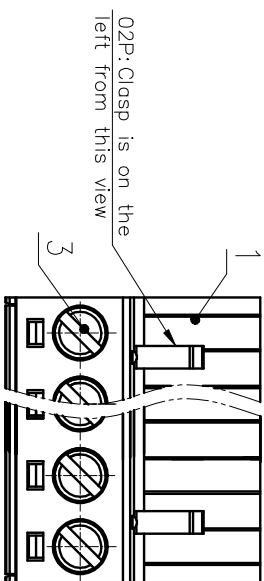

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 2:1	SHEET 1/1
<p>DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD</p> <p>NAME: ZEDGK-5.08-XXP-1Y-1000A(H)</p> <p>DRAWING NO.: 10001600</p> <p>DRAFT: For JY.2020.03.24</p>							
<p>MATERIAL: SURFACE: /</p> <p>MAT NO.: /</p> <p>STATUS: /</p> <p>APPD: /</p> <p>CHKD: /</p> <p>TYPE: CUSTOMER DRAWING</p>							
<p>UL 标准 /UL Standard: B C D</p> <p>额定电压/电涌 /Rated Voltage(V)/Current(A) 300/15 / 300/10</p> <p>IEC 标准 /IEC Standard: III/2</p> <p>过压类别 /Overvoltage Category /污染等级 /Pollution Degree</p> <p>额定电压/电涌 /Rated Voltage(V)/Current(A) 320/20</p> <p>额定脉冲电压 (KV) /Rate Impulse Voltage(KV) 4.0</p> <p>额定扭矩 /Torque Tightening(N.m/Lb.in) M3 0.5/4.43</p> <p>线径范围 (硬线和软线) /Wire Range(rigid and flexible)(mm² /AWG) 1.0~2.5/28~12</p> <p>间距/Pitch(mm) /线径范围 /Poles 5.08 /N=02~24P</p> <p>剥线长度 /Stripping length(mm) 7~8</p> <p>使用温度范围 /Operating temperature(°C) -40~+105</p> <p>符合 RoHS 要求 /Conform to RoHS Yes</p> <p>标准颜色编号 /Standard color number: /</p> <p>PANTONE /RAL /</p>							