

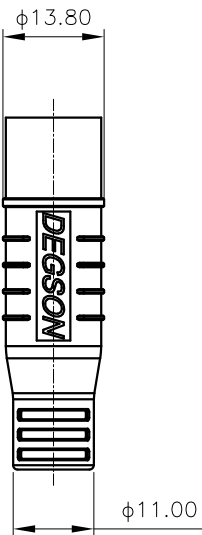
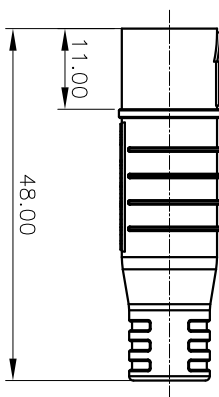


公差/General Tolerances(mm)		公差/General Tolerances(mm)		公差/General Tolerances(mm)		公差/General Tolerances(mm)		公差/General Tolerances(mm)		公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	~3	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													0.1/10
													±2'

未标尺寸请参考3D文件



型号说明

SM-EBM-3006-F-LXXX-00A(H)

插座

包塑式

系列名称

母端

线长: xxxmm

通用型环保产品

产品插针数量
功率针3pin,
PE针0pin,
信号针6pin

额定电压/电流/Rated Voltage/Current	60V/15A
绝缘电阻/Insulation resistance	≥30MΩ
插拔次数/Mechanical working life(mating cycles)	100
耐电压/Withstanding voltage	500V AC
使用温度范围/Operating temperature(°C)	-25~+80
防水等级/Levels of protection	IP67(mated)
接线方式/Terminal	Soldering

MATERIAL: /

SURFACE: /

MAT NO.: /

STATUS: /

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

APPD: /

NAME: /

CHKD: /

SM-EBM-3006-F-LXXX-00A(H)

DRAFT: LJP 2021.8.24

DRAWING NO.: /

SIZE: A4

mm
inch

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

A0					
REV	ECN	DESCRIPTION	DRAFT	DATE	
			XXX XX	20XX.XXX X	