

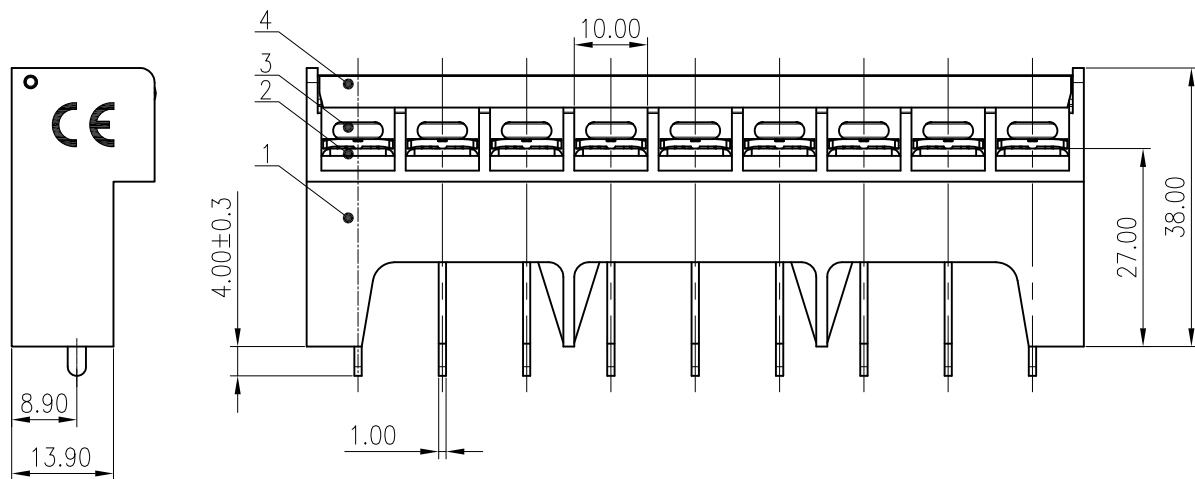


(无盖板示意图)

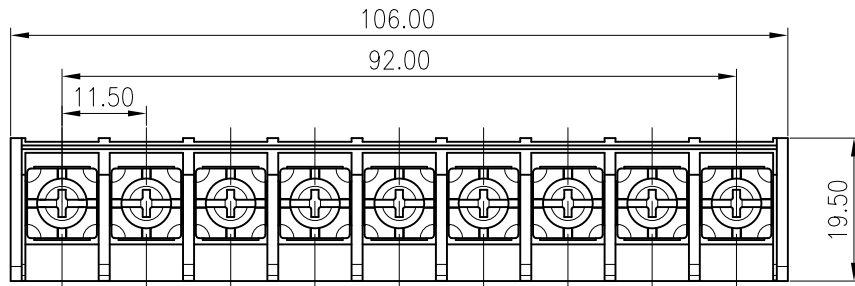


未注公差/General tolerances(mm)												0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/30	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 1.24/11		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	20~10		
间距/Pitch(mm)/线数范围/Poles	11.5/N=09P		
剥线长度/Stripping length(mm)	10~11		
使用温度范围/Operating temperature(°C)	-30~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

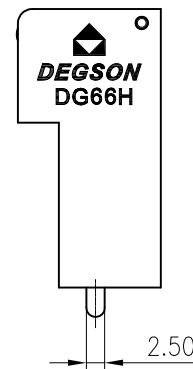

PCB LAYOUT

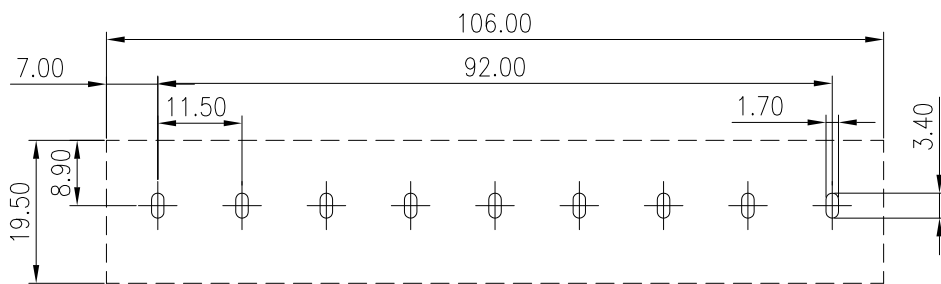

4	Cover	PC	UL94V-2
3	Screw	Steel	M4,Ni plated
2	Pin header	Copper alloy	Sn plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

MATERIAL:	/	SURFACE:	/
MAT.NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD: PengM 2021.01.15	Description: DG66H-B-09P-1Y-00A(H)		
CHKD: CaoLB 2021.01.15	DRAWING NO.: DG66H-B-C01		
DRFT: ZhangJ 2021.01.18	TYPE: CUSTOMER DRAWING		REV TO
⊕	SIZE: A4	SCALE: 1:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交易本文件的内容。未经许可擅自复制或传播，侵权者将承担法律责任。 实用新型和外观设计专利的所有权利。