
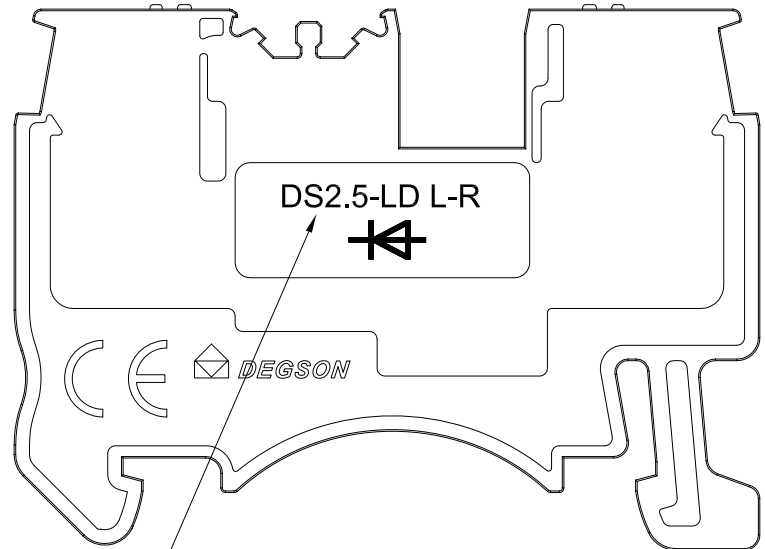
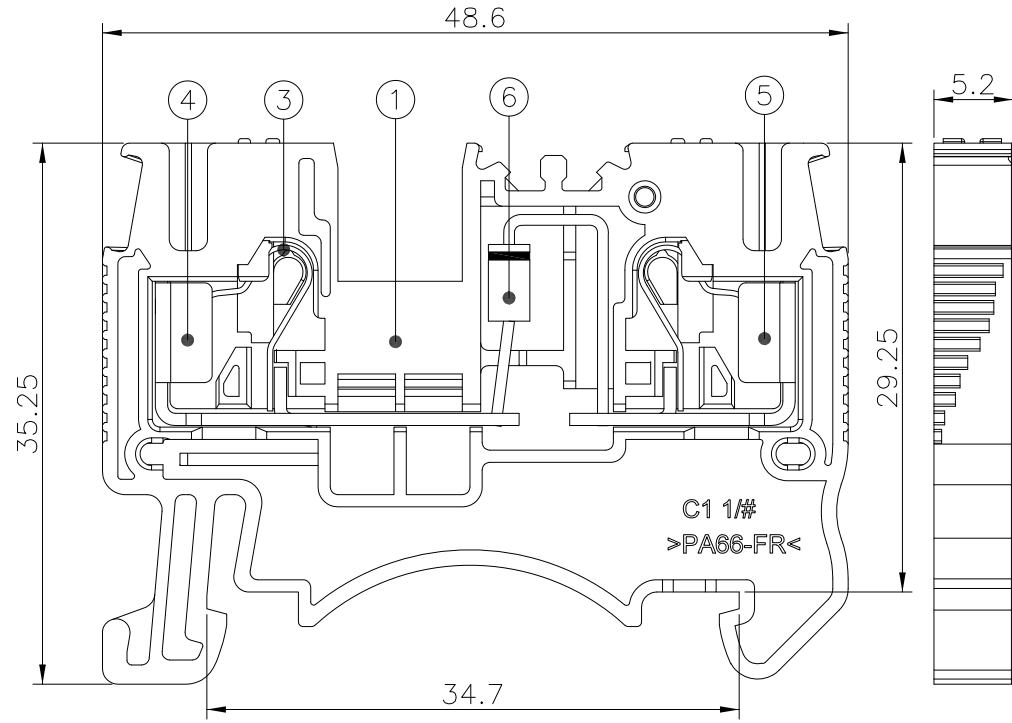



未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

额定电压/电流/Rated Voltage(V)/Current(A)	250/1A
最大逆向电压/Reverse Voltage(KV)	1.3
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	26-12/0.2-2.5&4(sol)
间距/Pitch(mm)	5.2
剥线长度/Stripping length(mm)	10-12
使用温度范围/Operating temperature(°C)	40~+105
符合RoHS环保要求/Conform to RoHS	Yes

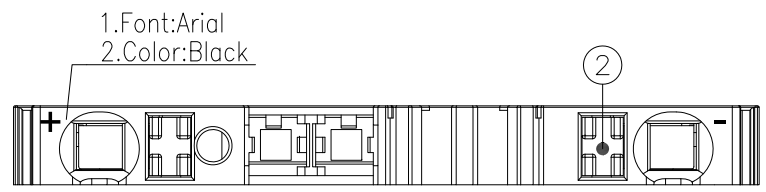

1.Font:Arial
2.Color:Black

6	Diode	/	/
5	Current_carrier 2	Copper	Sn Plated
4	Current_carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

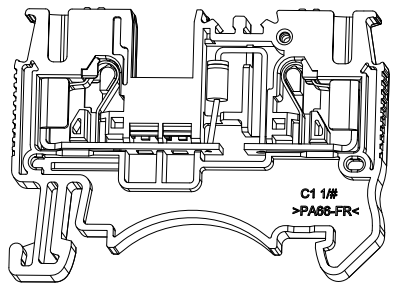

00	/	/	MIS	2021.08.12	DRFT: MIS	2021.08.12	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
REV	ECN	DESCRIPTION	DRFT	DATE	比例	1:1	/	CUSTOMER DRAWING	/	2:1	1/1

	MATERIAL: /	SURFACE: /
	MAT. NO./REV: /	MAT. STATUS: /
APPD: LiGL	2021.08.16	NAME
CHKD: MoEK	2021.08.12	DS2.5-LD L-R-01P-IY-00A(H)
DRFT: MIS	2021.08.12	

Transfer or Distribution of this document as well as the utilization or reproduction of its contents are prohibited unless authorized in writing. All rights reserved for patent, trademark, or design registrations. 非经书面明确授权, 否则禁止转让、复制、利用、交流本文件的内容。未经书面明确授权, 否则禁止任何涉及发明、实用新型和外观设计的所有权利。