
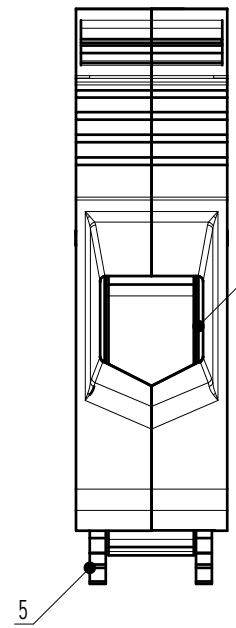
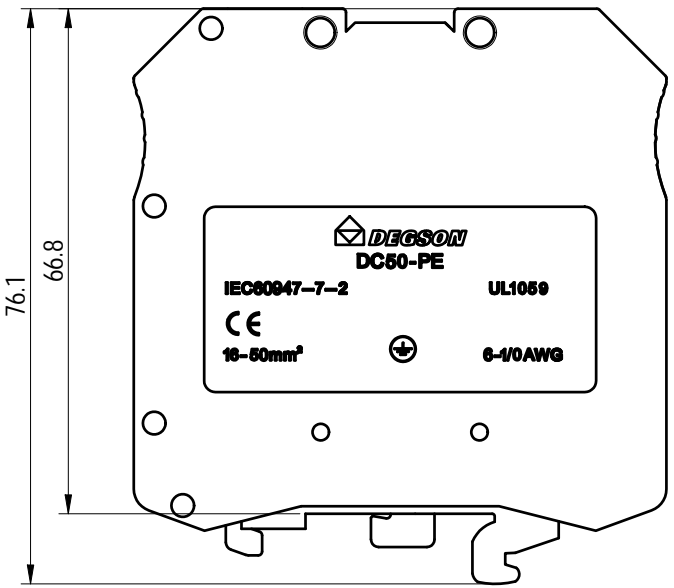
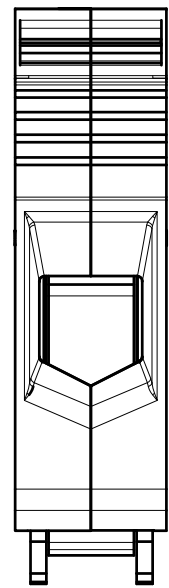
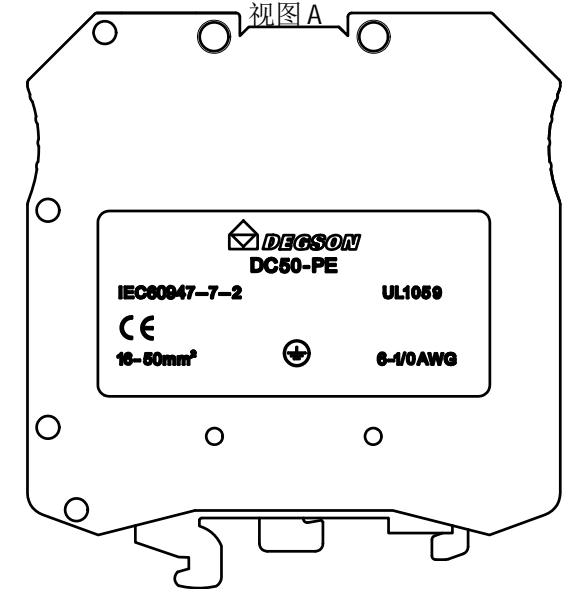


Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent. 除专利声明外，其他内容均受法律保护。未经许可，不得复制或传播。 凡在本文件中所涉及之专利，其权利均归相应权利人所有，特此声明。

FOR-1755 Rev. 1.7

5	Ground contact	/	/
4	Cage	Steel	Zn Plated
3	Screw	Copper Alloy	Zn Plated
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±2'

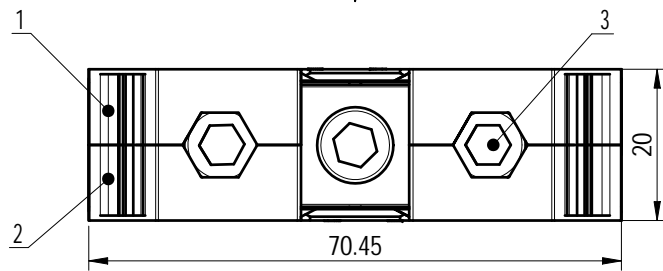


5	Ground contact	/	/
4	Cage	Steel	Zn Plated
3	Screw	Copper Alloy	Zn Plated
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M6, 6.0/52.17		
线径范围(硬线和软线)/Wire Range (rigid and flexible)(AWG/mm²)	6-1/0 / 16-50		
间距/Pitch(mm)/线数范围/Poles	20/N=01P		
剥线长度/Stripping length(mm)	22~23		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

DEGSON		MATERIAL: /	SURFACE/COLOR: /
		MAT NO./REV: /	MAT STATUS: /
APPD: Peng M	2022.08.21	NAME	
CHKD: Gao WG	2022.08.21	DC50-PE-01P-1Y-01A(H)	
DRFT: Huang RJ	2022.08.21	DRAWING NO. /	TYPE CUSTOMER DRAWING
00	/	DRAWING STATUS /	SCALE 1:1
REV	ECN	DESCRIPTION	SHEET 1/1

00	/	/	Huang RJ	2022.08.21
REV	ECN	DESCRIPTION	DRFT	DATE



1 2 3 4 5 6