



未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~	~	~	~	~	~	~	~	~	~	~	~	~	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

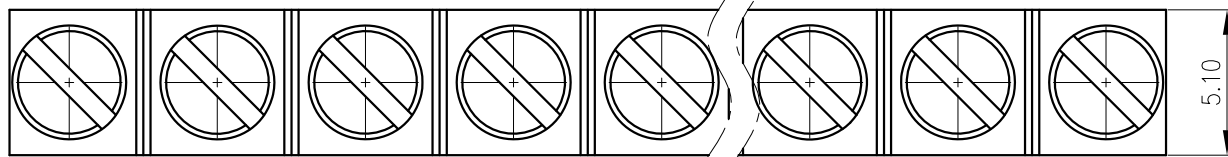

$$5.2 \times (N-1) + 4.2$$

5.20

15.30

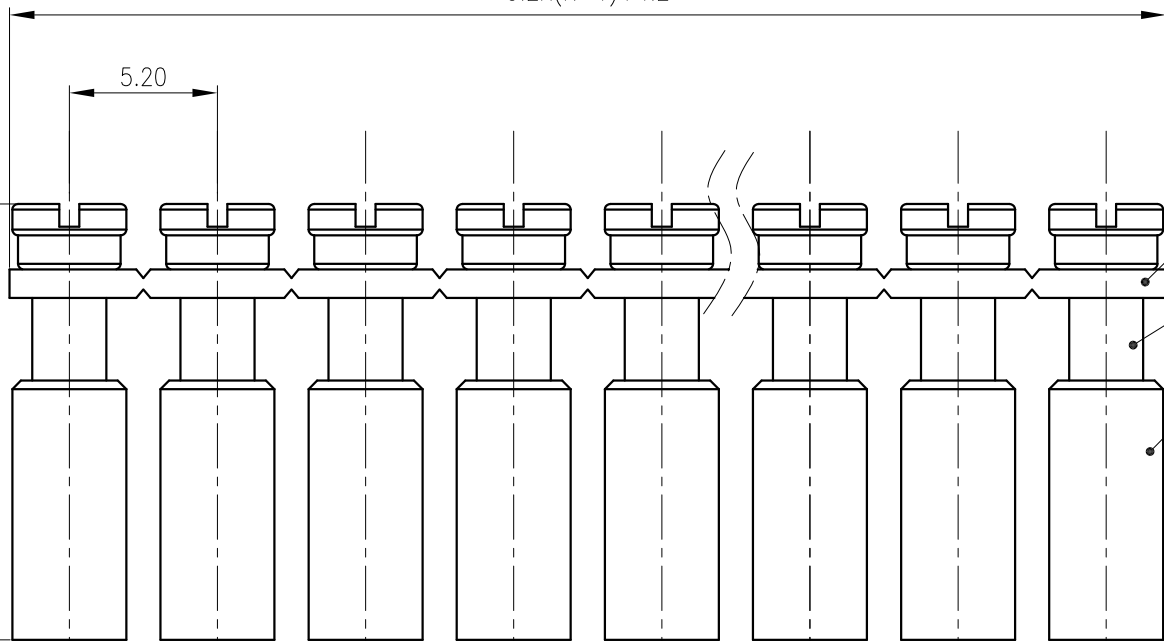

3	Pillar	Copper Alloy	M3/Ni Plated
2	Screws	Copper Alloy	M3/Ni Plated
1	Current carrier	Copper	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			B C D
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M3, 0.5/4.43
间距/Pitch(mm)/线数范围/Poles			5.20/N=02~10P
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL:	SURFACE:		
MAT NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS:			
APPD: Li GL 2020.06.06	NAME: FBRI XX-5		
CHKD: Mao J 2020.06.06	DRAWING NO.: FBRI 10-5-C01		
DRFT: Feng X 2020.05.22	REV	TO	
⊕	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 4:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE