

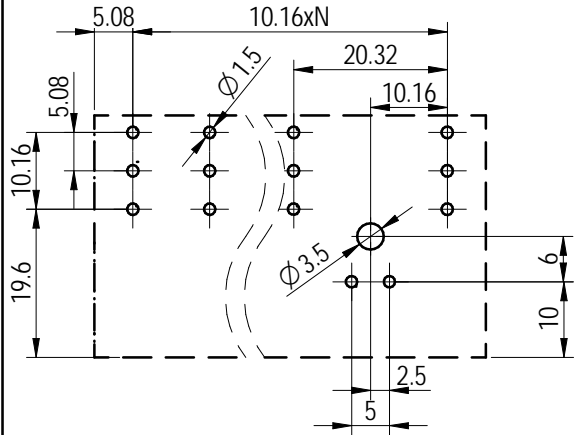
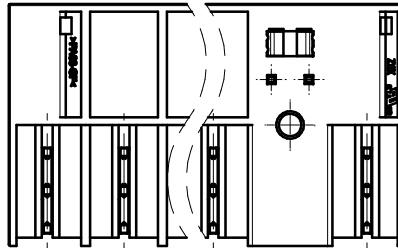




PCB LAYOUT

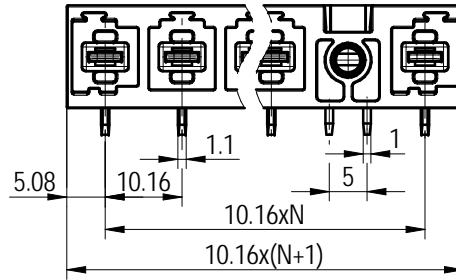

Lx: Refers to the fixed position in the X position from left to right



未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

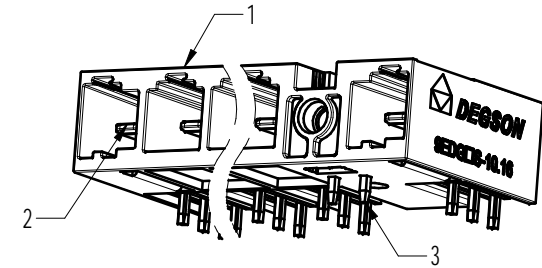

ITEM	NAME OF PART	MATERIAL	NOTES
3	Soldering-contact	Copper Alloy	Sn_plated
2	Pin_header	Copper	Ag_plated
1	Housing	PA66-GF	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/57	300/57	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	690/78.3	1000/78.3	1000/78.3
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	8	6
间距/Pitch(mm)/线数范围/Poles	10.16/N=02~04P		
使用温度范围/Operating temperature(°C)	-40~+130		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	black		



APPD: David	2023-05-11
CHKD: David	2023-05-11
DRFT: 曹心一	2023-05-11

MATERIAL:	SURFACE/COLOR:		
MAT NO./REV: - / 00	MAT STATUS: 样品		
NAME			
9EDGRS-10.16-Lx-XXP-1Y-00Z (H)			

REV	ECN	DESCRIPTION	DRFT	DATE
00				

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200147044	CUSTOMER DRAWING	work	1:1	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in general. Withdrawals will be made for components. All rights reserved for patent. 除专利等明确标注外，其他内容均受法律保护。 未经授权，禁止复制或传播。 本公司保留对涉及发明、实用新型及外观设计专利的权利。 未经授权，禁止复制或传播。