


公差/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.05/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.08	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±1	±1

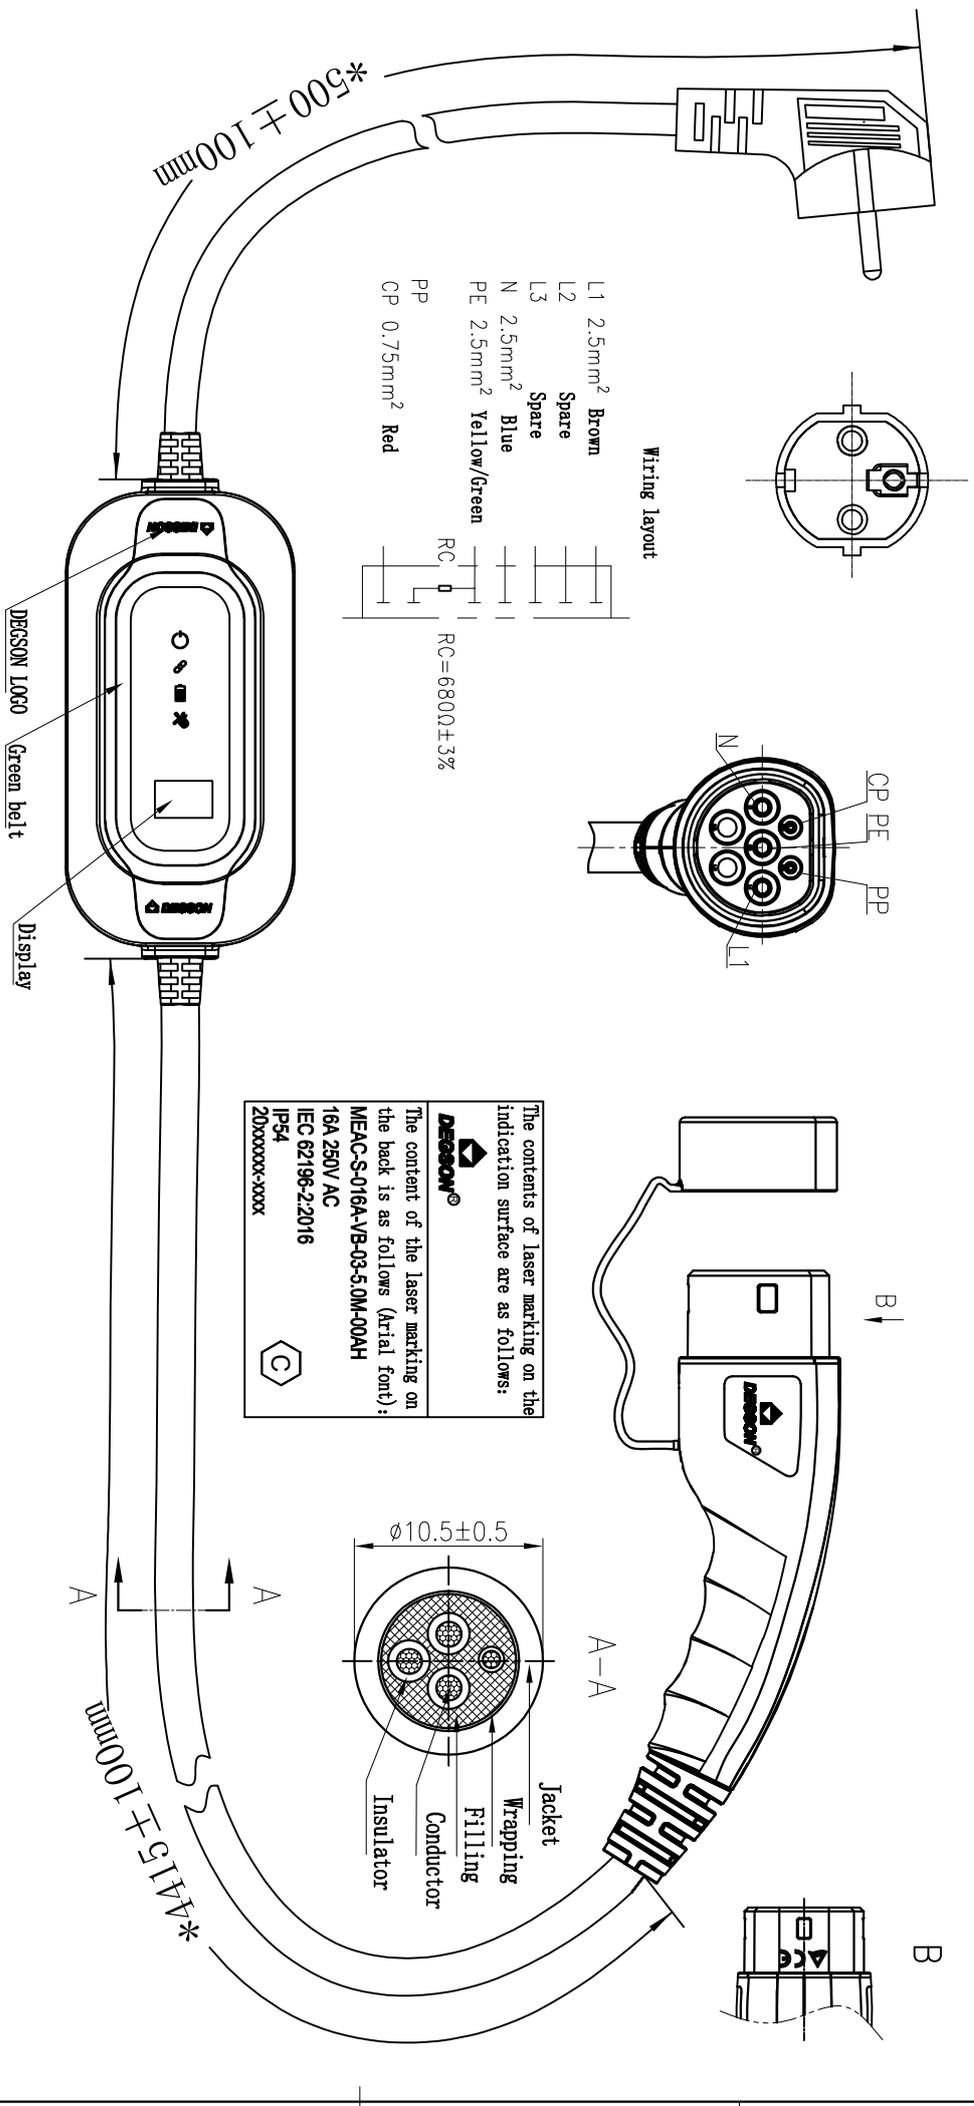

Rated Voltage/Current	240V AC/16A
Insulate Resistance	>5MΩ,500V DC, 1min
Withstanding Voltage	L、N and PE, 2500V AC 1min L and N, 2500V AC 1min
Ingress Protection	IP65(IC-GPD)
Insertion/Pullout Times	10,000 Times
Insertion/Pullout Force	<75N
Operating temperature(°C)	-30~+50
RCD Protection	type B
Packaging specification	SOP-Y-3166
Cable specification	3*2.5mm ² +1*0.75mm ² Black
Reference standard	IEC 62196-1/2 IEC 61851
Key controlled symbol	*

REV	ECN	DESCRIPTION	DRT	DATE

MATERIAL:	/	SURFACE:	/
MAT. NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
STATUS:	/	Description:	
APPD:	/	MEAC-S-016A-VB-03-5.0M-00A(H)	
CHKD:	/	DRAWING NO.:	
DRT:	Li P 2023.04.10	TYPE:	CUSTOMER DRAWING
SIZE:	A4	SCALE:	1:3
	mm	SHEET	1/1
	(inch)		