




未注公差/General tolerances(mm)										0.1/1.0				
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	H7
~	~	~	~	~	~	~	~	~	~	~	~	~	~	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

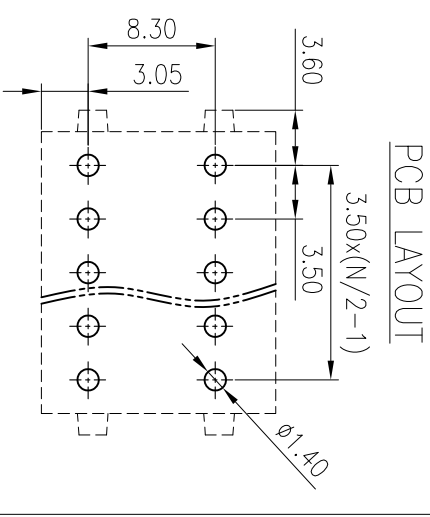

文 管
研 发
专 用
2020. 05. 27
(仅限内部使用, 对外无效)

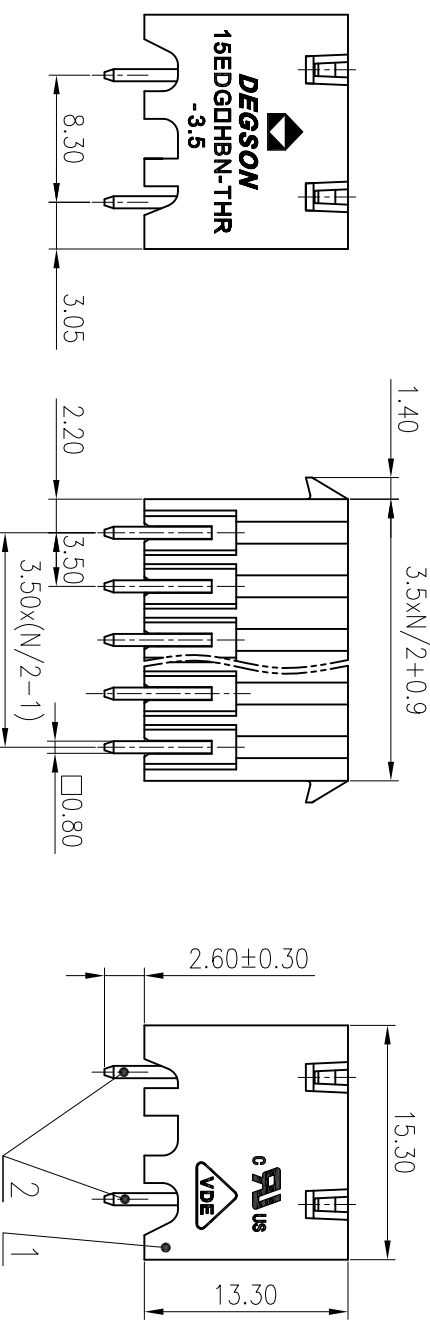

2	Pin	Copper	Sn Plated	
1	Housing	Thermoplastic	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	

UL 标准/UL Standard:	B	C	D
额定电压/电流 /Rated Voltage(V)/Current(A)	300/8	/	300/8
EC 标准 /IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2		
额定电压/电流 /Rated Voltage(V)/Current(A)	250/8		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5		
间距/Pitch(mm)/线数范围/Poles	3.5/N=04~48P		
使用温度范围/Operating temperature(°C)	-40~+130		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /		SURFACE: /	
MAT NO.:	/		
STATUS:	/		
APPR: LanChH	2020.05.27	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
CHKD: YuJZ	2020.05.27	DRAWING NO.:15EDGVHBN-THR-3.5-XXP-1Y-10A(H)	
DFT: WL	2015.09.16	TYPE: CUSTOMER DRAWING	SCALE: 2:1
REV	ECN	DESCRIPTION	DATE
(1)		Drawing update	2020.05.27
			DRFT
			DATE
			SIZE: A4
			(mm)
			(inch)
			TYPE: CUSTOMER DRAWING
			SCALE: 2:1
			SHEET 1/1